


## Stainless Steel EN 1092-1 TYPE 01B Slip on PN16 Flange

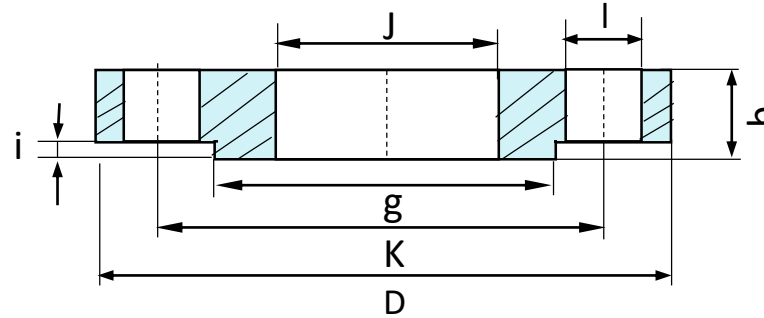

| Pipe            |        |       |       |       |      |      |       |      |        |              |             |
|-----------------|--------|-------|-------|-------|------|------|-------|------|--------|--------------|-------------|
| Nominal size in | O.D.   | J     | k     | D     | i    | b    | g     | I    | Thread | No. of holes | Weight (kg) |
| 0.50            | 21.30  | 22.0  | 65.0  | 95.0  | 2.00 | 14.0 | 45.0  | 14.0 | M12    | 4            | 0.59        |
| 0.75            | 26.90  | 27.5  | 75.0  | 105.0 | 2.00 | 16.0 | 58.0  | 14.0 | M12    | 4            | 0.85        |
| 1               | 33.70  | 34.5  | 85.0  | 115.0 | 2.00 | 16.0 | 68.0  | 14.0 | M12    | 4            | 1.01        |
| 1.25            | 42.40  | 43.5  | 100.0 | 140.0 | 2.00 | 18.0 | 78.0  | 18.0 | M16    | 4            | 1.67        |
| 1.50            | 48.30  | 49.5  | 110.0 | 150.0 | 3.00 | 18.0 | 88.0  | 18.0 | M16    | 4            | 1.83        |
| 2               | 60.30  | 61.5  | 125.0 | 165.0 | 3.00 | 20.0 | 102.0 | 18.0 | M16    | 4            | 2.44        |
| 2.50            | 73.03  | 74.5  | 145.0 | 185.0 | 3.00 | 20.0 | 122.0 | 18.0 | M16    | 4            | 2.99        |
| 3               | 88.90  | 90.5  | 160.0 | 200.0 | 3.00 | 20.0 | 138.0 | 18.0 | M16    | 8            | 3.26        |
| 4               | 114.30 | 116.0 | 180.0 | 220.0 | 3.00 | 22.0 | 158.0 | 18.0 | M16    | 8            | 4.00        |
| 5               | 141.30 | 143.0 | 210.0 | 250.0 | 3.00 | 22.0 | 188.0 | 18.0 | M16    | 8            | 4.95        |
| 6               | 168.30 | 170.5 | 240.0 | 285.0 | 3.00 | 24.0 | 212.0 | 22.0 | M20    | 8            | 6.54        |
| 8               | 219.10 | 221.5 | 295.0 | 340.0 | 3.00 | 26.0 | 268.0 | 22.0 | M20    | 12           | 9.03        |
| 10              | 273.00 | 276.5 | 355.0 | 405.0 | 3.00 | 29.0 | 320.0 | 26.0 | M24    | 12           | 13.21       |
| 12              | 323.90 | 327.5 | 410.0 | 460.0 | 4.00 | 32.0 | 378.0 | 26.0 | M24    | 12           | 17.49       |
| 14              | 355.60 | 359.0 | 470.0 | 520.0 | 4.00 | 35.0 | 438.0 | 26.0 | M24    | 16           | 26.53       |
| 16              | 406.40 | 411.0 | 525.0 | 580.0 | 4.00 | 38.0 | 490.0 | 30.0 | M27    | 16           | 33.83       |
| 20              | 508.00 | 513.5 | 650.0 | 715.0 | 4.00 | 46.0 | 610.0 | 33.0 | M30    | 20           | 61.83       |